




WINGLETS

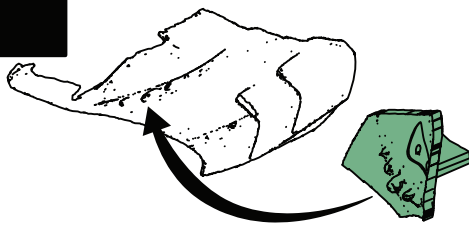

Align the mask with this body detail



Glue it using whiteglue (vynilic glue).

Let it dry fully, it is important it is sturdy but you will need to remove it after.

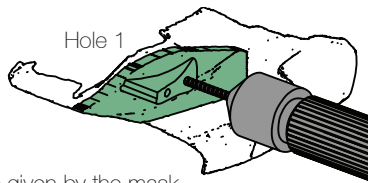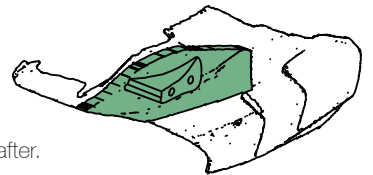


Drill manually, slowly, using 1.2mm drillbit.

Keep the angle given by the mask

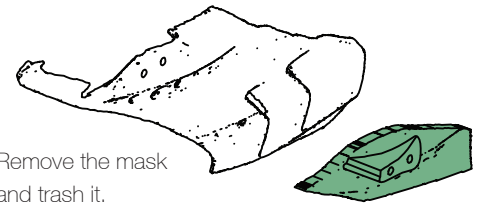
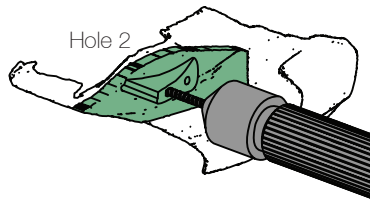


Remove the mask and trash it.

Add this filler and sand it flush with the body. Keep the hole (screw)

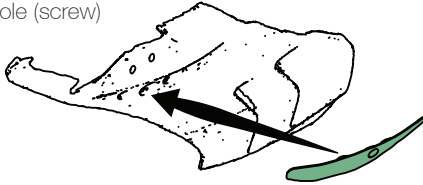

Check the accuracy and fitting. Glue the winglet once the body is finished




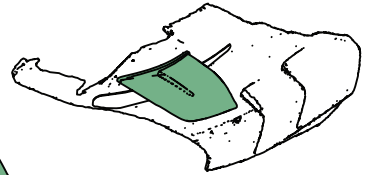
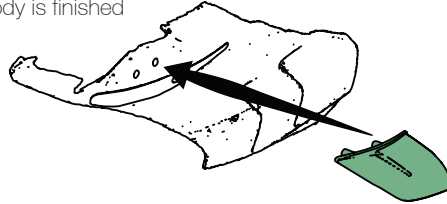


EXHAUST SUPPORTS

Align the masks as in the pictures. Pay attention to direction and position.


Glue it using whiteglue (vynilic glue).

Let it dry fully, it is important it is sturdy but you will need to remove it after.

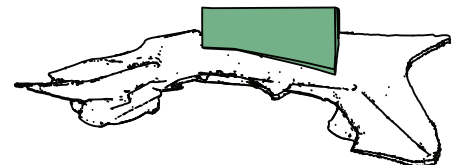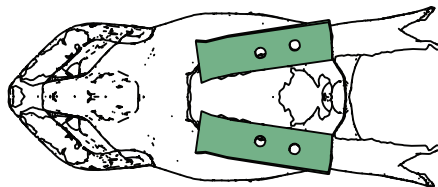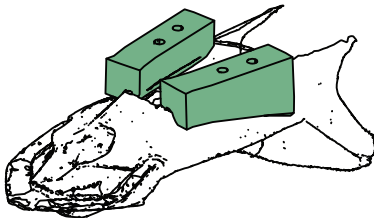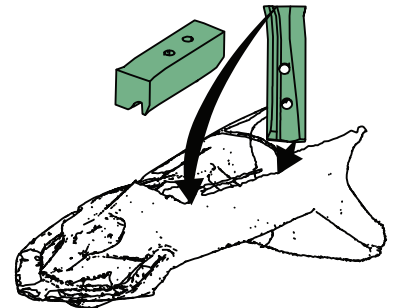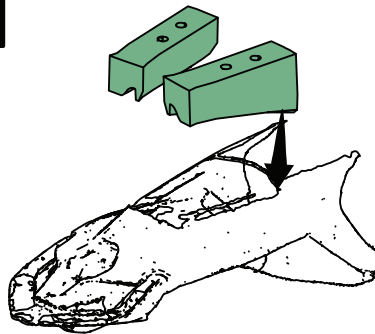


Drill manually, slowly, using 1.2mm drillbit.

Keep the angle given by the mask!




Hole 1






Hole 2

Remove the masks and insert the supports





Check the direction and position with the exhausts

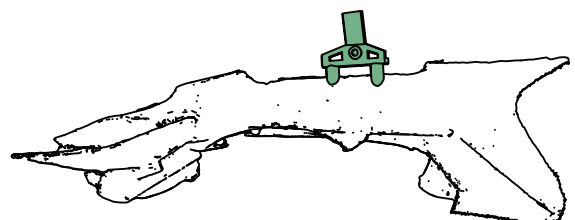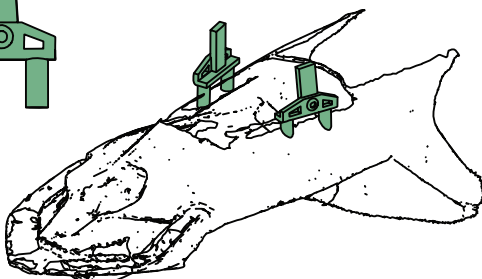



RIMS

Remove these supports

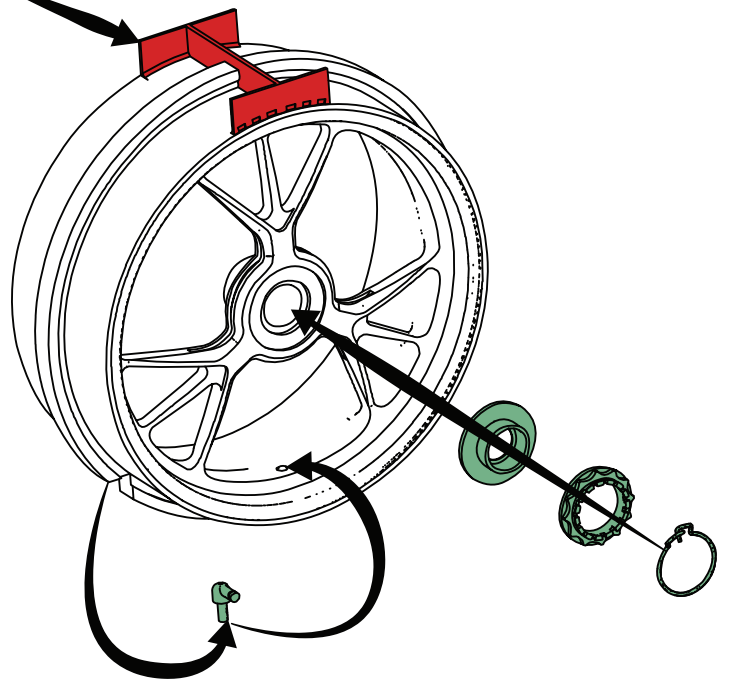
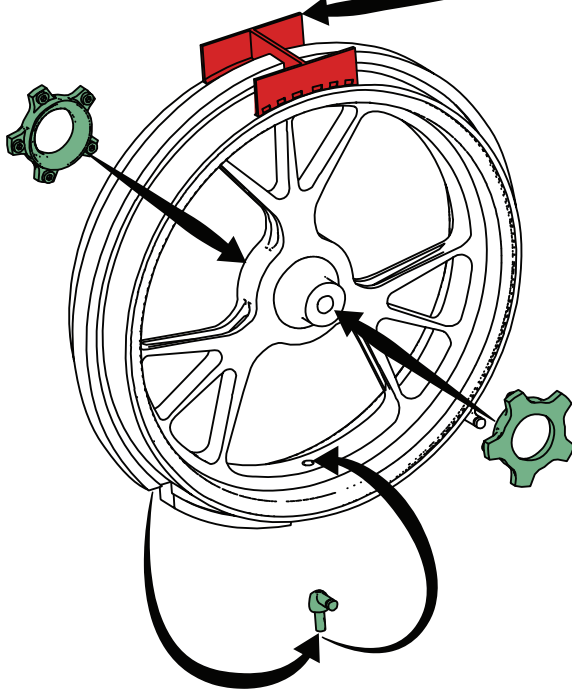


EXHAUST




Identify the springs and clean them from supports. Inspect the exhaust, and if a clip has been damaged, replace it with spare provided. Use the top pin to hold and manage the clip, remove it only AFTER it is glued in position, to simplify the process.

Glue the springs in position.

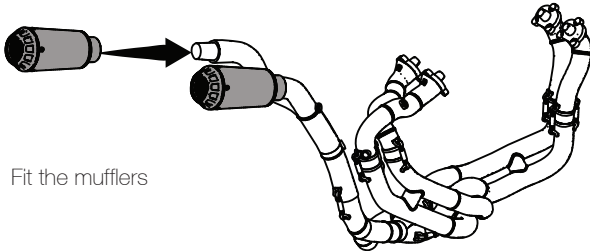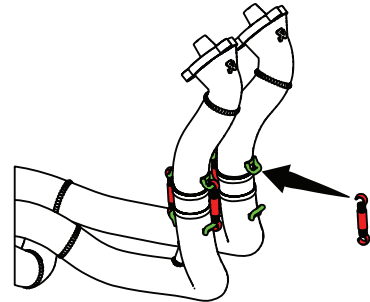


Fit the mufflers


Fit the top cover from above. Use the centering pins to align it. Double check with exhaust supports.

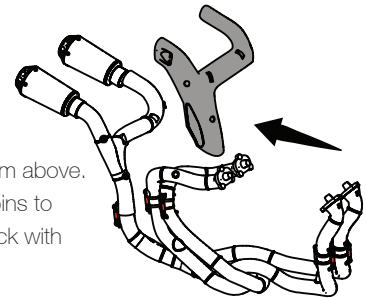

Fit the heat cover from the side. Use the centering pins to snap it.

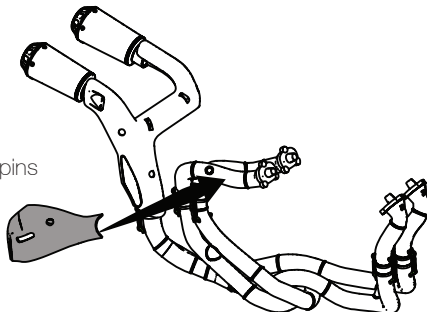

Fit the full exhaust to the bike, before applying the fairings. It should snap into exhaust holes. Apply decals as following.

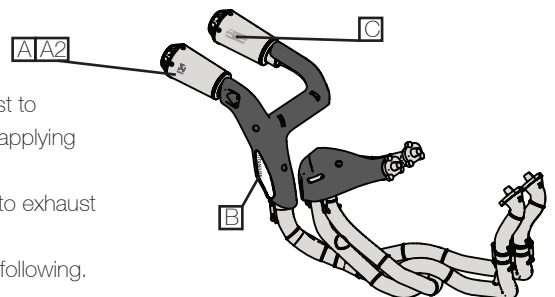

At last, fit the lower covers. The part on the right has an optional insert.

